



PRODUCT SPECIFICATION

COSMO ELECTRONICS CORPORATION	REED RELAY: C2C120001	SHEET 1 OF 2
---	---------------------------------	--------------

1. OUTSIDE DIMENSION : UNIT (mm)

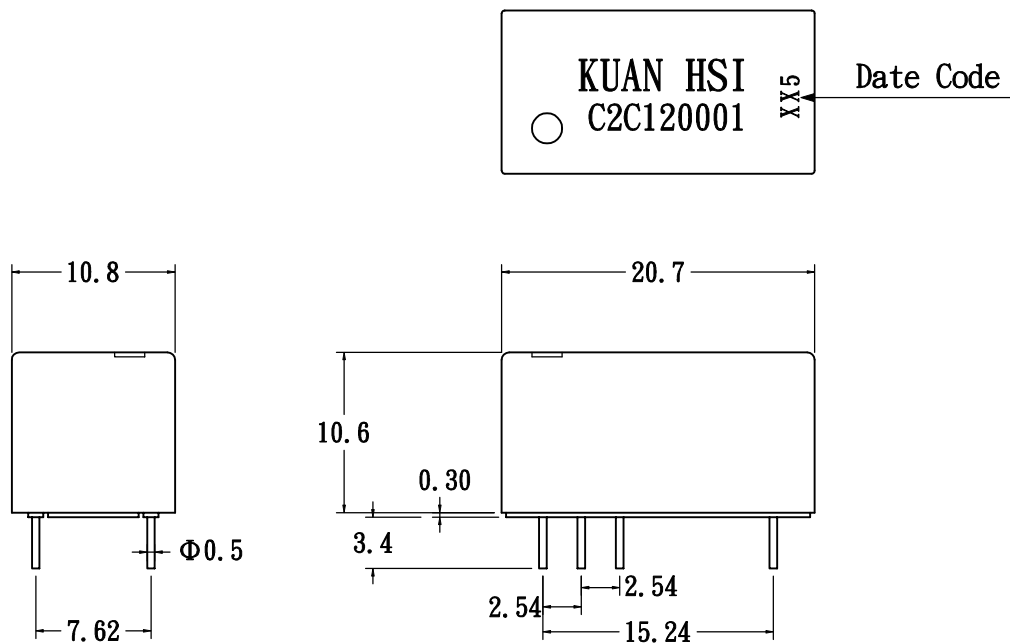

2. SCHEMATIC : TOP VIEW

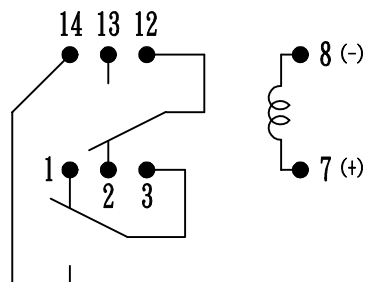

PRODUCT SPECIFICATION

COSMO ELECTRONICS CORPORATION	REED RELAY: C2C120001	SHEET 2 OF 2
---	---------------------------------	--------------

3.0 COIL RATINGS: (AT 20°C)

3.1	Coil resistance	500	Ω	($\pm 10\%$)
3.2	Nominal coil current	12	VDC	
3.3	Maximum Continuous voltage	18	VDC	
3.4	Must operate	9.0	VDC	
3.5	Must release	1.8	VDC	
3.6	Rated current	24	mA	

4.0 ELECTRONICAL CHARACTERISTICS:

4.1	Contact resistance	150	m Ω	(max)
4.2	Operate time	0.7	ms	(max)
4.3	Bounce time	0.5	ms	(max)
4.4	Release time	1.0	ms	(max)
4.5	Insulation resistance (100 VDC open contact)	10^9	Ω	(min)
4.6	Power	3.0	VA	(max)
4.7	Switching voltage	100	VDC	(max)
4.8	Switching current	0.25	A	(max)
4.9	Carry current	0.5	A	(max)
4.10	Breakdown voltage (across open contact)	200	VDC	(min)
	(between coil & contact)	4000	VDC	(min)
4.11	Life expectancy (signal level)	5×10^7		
4.12	Operating temp	-40 to 85°C		
4.13	Storage temp	-50 to 125°C		
4.14	Resonant frequency	3.5	KHZ	
4.15	Vibration (10-2000HZ)	20	g	(max)
4.16	Minimum permissible load	100	mVDC	10uA