

PCG series

2 Pole Miniature Power PC Board Relay

Appliances, Audio Equipment, Office Machines



- UL File No. E82292
- CSA File No. LR48471
- SEMKO File No. 8744066
- SEV File No. 98110096

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Features

- Meet UL Tungsten TV-5 rating.
- 2 Form A contact arrangements.
- Meet UL, CSA, SEMKO and SEV requirements.
- Meet 4,000V dielectric voltage between coil and contacts.
- Meet 10,000V surge voltage between coil and contacts (1.2 / 50µs).

Contact Data @ 20°C

Arrangements: 2 Form A (DPST-NO).

Material: AgSnO.

Max. Switching Rate: 300 ops./min. (no load).
30 ops./min. (rated load).

Expected Mechanical Life: 10 million operations (no load).

Expected Electrical Life: 100,000 operations (rated load).

Minimum Load: 100mA @ 5VDC.

Initial Contact Resistance: 100 milliohms @ 1A, 6VDC.

Contact Ratings

Ratings: 5A @ 250VAC resistive, 100,000ops.
8A @ 250VDC resistive, 50,000ops.
TV-5 @ 120VAC Tungsten, 25,000ops.

Max. Switched Voltage: AC: 277V.
DC: 30V.

Max. Switched Current: 10A.

Max. Switched Power: 1,250VA, 380W.

Initial Dielectric Strength

Between Open Contacts: 1,000VAC 50/60 Hz. (1 minute).
Between Coil and Contacts: 4,000VAC 50/60 Hz. (1 minute).
Surge Voltage Between Coil and Contacts: 10,000V (1.2 / 50µs).
Surge Voltage Between Contact and other Pole: 6,000V (1.2 / 50µs).

Initial Insulation Resistance

Between Mutually Insulated Elements: 1,000M ohms min. @ 500VDCM.

Coil Data

Voltage: 5 to 48VDC.
Nominal Power: 540 mW
Coil Temperature Rise: 50°C max., at rated coil voltage.
Max. Coil Power: 130% of nominal.
Duty Cycle: Continuous.

Coil Data @ 20°C

Rated Coil Voltage (VDC)	Nominal Current (mA)	PCG		
		Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
5	106.4	47	4.00	0.25
6	88.0	68	4.80	0.30
9	58.0	155	7.20	0.45
12	44.4	270	9.60	0.60
24	21.8	1,100	19.20	1.20
48	11.0	4,400	38.40	2.40

Operate Data

Must Operate Voltage: 80% of nominal voltage or less.
Must Release Voltage: 5% of nominal voltage or more.
Operate Time: 15 ms max.
Release Time: 5 ms max.

Environmental Data

Temperature Range:
Operating: -30°C to +70°C
Vibration, Mechanical: 10 to 55 Hz., 1.5mm double amplitude
Operational: 10 to 55 Hz., 1.5mm double amplitude.
Shock, Mechanical: 1,000m/s² (100G approximately).
Operational: 100m/s² (10G approximately).
Operating Humidity: 20 to 85% RH. (Non-condensing).

Mechanical Data

Termination: Printed circuit terminals.
Enclosure (94V-0 Flammability Ratings):
PCG-N: Vented (Flux-tight) snap-on cover.
Weight: 0.63 oz (18g) approximately.

Ordering Information

Typical Part Number ▶

PCG -2 24 D 2 M N ,000

1. Basic Series:

PCG = Miniature Power PC board relay.

2. Termination:

2 = 2 pole.

3. Coil Voltage:

05 = 5VDC 09 = 9VDC 24 = 24VDC
06 = 6VDC 12 = 12VDC 48 = 48VDC

4. Coil Input:

D = Standard

5. Contact Material:

2 = AgSnO

6. Contact Arrangement:

M = 2 Form A, DPST-NO.

7. Contact Rating:

N = Vented (Flux-tight)* snap-on cover.

8. Suffix:


,000 = Standard model Other Suffix = Custom model

* Not suitable for immersion cleaning processes.


Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.

None at present.


Outline Dimensions

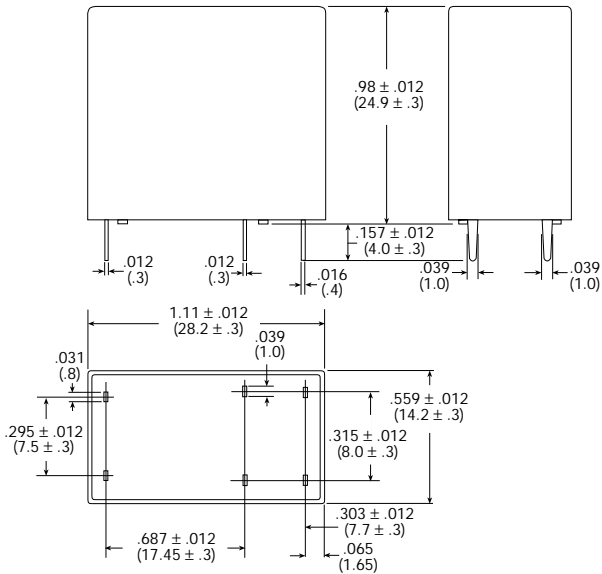

Wiring Diagram (Bottom View)




PC Board Layout (Bottom View)

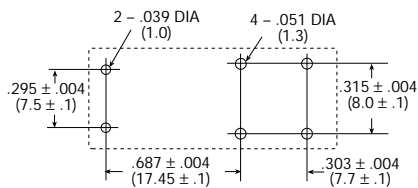


Reference Data

Coil Temperature Rise

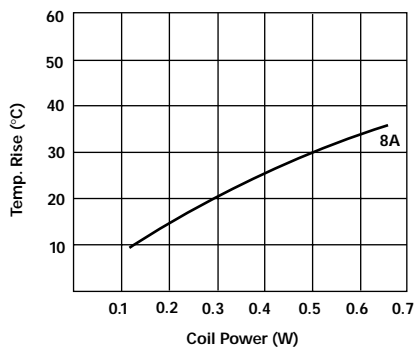

Operate Time

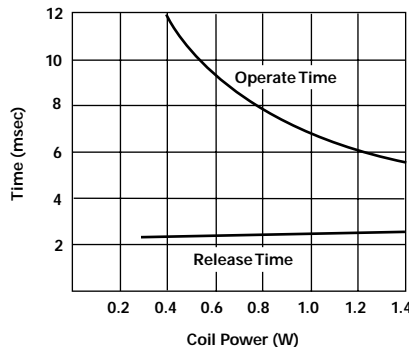

Life Expectancy

