

# Low Signal Relay G5V-2

- Suitable for handling low signals in computer peripherals, telecommunications and security equipment.
- Capable of switching loads up to 2 A.
- Conforms to FCC part 68 1500 V surge withstand.
- Reliable bifurcated crossbar contacts.
- Fully-sealed construction.



## Ordering Information

To Order: Select the part number and add the desired coil voltage rating (e.g., G5V-2-DC12).

Type	Contact form	Construction	Model
Standard	DPDT	Fully-sealed	G5V-2
High-sensitivity			G5V-2-H
Ultra-sensitive			G5V-2-H1

## Specifications

### ■ Contact Data

Item	Standard and high-sensitivity	Ultra-sensitive
Load	Resistive load (p.f. = 1)	
Rated load	0.50 A at 125 VAC 2 A at 30 VDC	0.5 A at 125 VAC 1 A at 24 VDC
Contact material	Ag (Au clad)	
Carry current	2 A	
Max. operating voltage	125 VAC 125 VDC	
Max. operating current	2 A	1 A
Max. switching capacity	62.5 VA 60W	62.5 VA 24W
Min. permissible load	10 $\mu$ A, 10 mVDC	

## ■ Coil Data

### Standard Type

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (Ref. value) (H)		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3	166.70	18	0.04	0.05	75% max.	5% min.	120% max. at 65°C (149°F)	Approx. 500
5	100	50	0.09	0.11				
6	83.30	72	0.16	0.19				
9	55.60	162	0.31	0.49				
12	41.70	288	0.47	0.74				
24	20.80	1,152	1.98	2.68				
48	12	4,000	--	--			110% max. at 60°C (140°F)	Approx. 580

### High-sensitivity Type

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (Ref. value) (H)		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3	120	25	0.04	0.07	75% max.	5% min.	120% max. at 70°C (158°F)	Approx. 360
5	72	70	0.12	0.19				
6	60	100	0.18	0.29				
9	40	225	0.40	0.62				
12	30	400	0.75	1.18				
24	15	1,600	3.16	4.81				
48	7.5	6,400	--	--			110% max. at 70°C (158°F)	

### Ultra-sensitive Type

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Coil inductance (Ref. value) (H)		Pick-up voltage	Dropout voltage	Maximum voltage	Power consumption (mW)
			Armature OFF	Armature ON				
3	50	60	0.18	0.26	75% max.	5% min.	150% max. at 70°C (158°F)	Approx. 150
5	30	166.7	0.46	0.47				
6	25	240	0.70	0.97				
9	16.70	540	1.67	2.33				
12	12.50	960	2.90	3.99				
24	8.30	2,880	6.72	9.27				
48	6.25	7,680	20.10	26.70				
								Approx. 300

**Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23°C (73°F) with a tolerance of ±10%.  
 2. The operating characteristics are measured at a coil temperature of 23°C (73°F).


## ■ Characteristics

<b>Contact resistance</b>		50 mΩ max. G5V-2, G5V-2-H, 100 mΩ max. G5V-2-H1
<b>Operate time</b>		7 ms max. (mean value: approx. 3.5 ms)
<b>Release time</b>		3 ms max. (mean value: approx. 0.8 ms)
<b>Bounce time</b>	<b>Operate</b>	Mean value: approx. 0.5 ms
	<b>Release</b>	Mean value: approx. 3.5 ms
<b>Operating frequency</b>	<b>Mechanical</b>	36,000 operations/hour
	<b>Electrical</b>	1,800 operations/hour (under rated load)
<b>Insulation resistance</b>		1,000 MΩ min (at 500 VDC)
<b>Dielectric strength</b>		1,000 VAC, 50/60 Hz for 1 minute between coil and contacts 1,000 VAC, 50/60 Hz for 1 minute between contacts of different poles 750 VAC, 50/60 Hz for 1 minute between contacts of same poles (500 VAC, 50/60 Hz for 1 minute between contacts of same poles for ultra-sensitive type)
<b>Surge withstand voltage</b>		1,500 V 10 X 160 μs (conforms to part 68 of FCC rules)
<b>Vibration</b>	<b>Mechanical durability</b>	10 to 55 Hz, 1.50 mm (0.59 in) double amplitude
	<b>Malfunction durability</b>	
<b>Shock</b>	<b>Mechanical durability</b>	1,000 m/s <sup>2</sup> (approx. 100 G)
	<b>Malfunction durability</b>	200 m/s <sup>2</sup> (approx. 20 G), 100 m/s <sup>2</sup> (approx. 10 G) for ultra-sensitive type
<b>Ambient temperature</b>	<b>Operating/storage</b>	-25° to 70°C (-13° to 158°F)
<b>Humidity</b>		35% to 85% RH
<b>Service life</b>	<b>Mechanical</b>	15 million operations min. (at operating frequency of 36,000 operations/hour)
	<b>Electrical</b>	See "Characteristic Data"
<b>Weight</b>		6 g (0.21 oz)


Note: Data shown are of initial value.

## ■ Characteristic Data


Maximum Switching Capacity

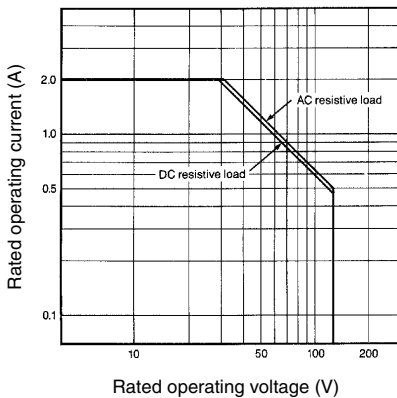

Electrical Service Life

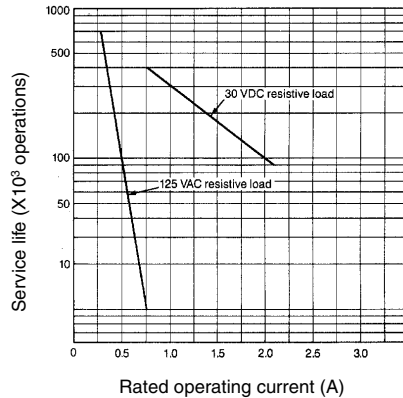

Ambient Temperature vs. Maximum Voltage

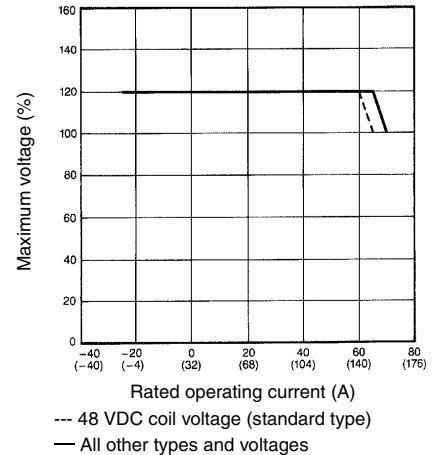


# Dimensions


Unit: mm (inch)

## Relays


### Fully-sealed

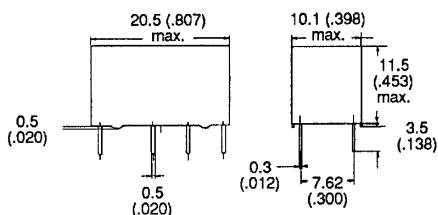

### Terminal arrangement/Internal (bottom view)



### Mounting holes (bottom view)



- Note:** 1. and indicate mounting orientation marks.  
 2. A tolerance of  $\pm 0.10$  (0.004) applies to the above dimensions.

## Approvals

### UL (File No. E41515)/CSA (File No. LR24825)

Type	Contact form	Coil rating	Contact ratings
G5V-2	DPDT	3 to 48 VDC	0.6 A, 125 VAC
G5V-2-H		3 to 24 VDC	0.6 A, 110 VDC 2.0 A, 30 VDC
G5V-2-H1		3 to 48 VDC	0.5 A, 125 VAC 0.6 A, 125 VAC 0.2 A, 110 VDC 0.6 A, 110 VDC 1.0 A, 24 VDC

- Note:** 1. The rated values approved by each of the safety standards may be different from the performance characteristics individually defined in this catalog.  
 2. In the interest of product improvement, specifications are subject to change.  
 3. UL1950 recognition.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters into inches, divide by 25.4



**OMRON ELECTRONICS LLC**  
 One Commerce Drive  
 Schaumburg, IL 60173  
**847-882-2288**

**OMRON CANADA, INC.**  
 885 Milner Avenue  
 Toronto, Ontario M1B 5V8  
**416-286-6465**

**OMRON ON-LINE**  
 Global - <http://www.omron.com>  
 USA - <http://www.omron.com/oei>  
 Canada - <http://www.omron.ca>